




# T Series, Polyamide 6.6 (PA66) – Standard

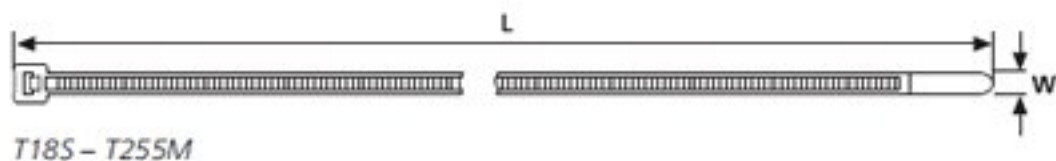

T18S – T255M

Material Data	
Material	Polyamide 6.6 (PA66)
Operating Temperature	-40 °C to +85 °C Continuous, (+105 °C for 500 h)
Flammability	UL94 V2

Technical Table

Article-No.	Type	Length (L)	Width (W)	Bundle Ø max.	Min. Tensile Strength (N)	Material	Colour	Application Tool
Polyamide 6.6 (PA66)								
111-02809	T18S	83	2.3	16.0	80	PA66	Natural (NA)	1-3, 5
111-02811	T18S	83	2.3	16.0	80	PA66	Black (BK)	1-3, 5
111-01910	T18R	100	2.5	22.0	80	PA66	Black (BK)	1-3, 5
111-01919	T18R	100	2.5	22.0	80	PA66	Natural (NA)	1-3, 5
111-02319	T18I	140	2.5	35.0	80	PA66	Natural (NA)	1-3, 5
111-02370	T18I	140	2.5	35.0	80	PA66	Black (BK)	1-3, 5
111-02010	T18L	205	2.5	55.0	80	PA66	Black (BK)	1-3, 5
111-02019	T18L	205	2.5	55.0	80	PA66	Natural (NA)	1-3, 5
111-02519	T25L	240	2.8	65.0	110	PA66	Natural (NA)	1-3, 5
111-02500	T25L	240	2.8	65.0	110	PA66	Black (BK)	1-3, 5
111-02619	T25LL	330	2.8	95.0	110	PA66	Natural (NA)	1-3, 5
111-02601	T25LL	330	2.8	95.0	110	PA66	Black (BK)	1-3, 5
111-03009	T30R	150	3.5	35.0	135	PA66	Natural (NA)	1-3, 5
111-03011	T30R	150	3.5	35.0	135	PA66	Black (BK)	1-3, 5
111-03410	T30L	190	3.5	50.0	135	PA66	Black (BK)	1-3, 5
111-03419	T30L	190	3.5	50.0	135	PA66	Natural (NA)	1-3, 5
111-04400	T30LR	260	3.3	65.0	180	PA66	Natural (NA)	1-5
111-03500	T30LL	290	3.5	80.0	135	PA66	Black (BK)	1-3, 5
111-03529	T30LL	290	3.5	80.0	135	PA66	Natural (NA)	1-3, 5
111-02900	T30XL	365	3.5	105	135	PA66	Natural (NA)	1-3, 5
111-02901	T30XL	365	3.5	105	135	PA66	Black (BK)	1-3, 5
111-03819	T40R	175	4.0	40.0	180	PA66	Natural (NA)	1-5
111-03801	T40R	175	4.0	40.0	180	PA66	Black (BK)	1-5
111-04600	T40I	290	4.0	80.0	180	PA66	Black (BK)	1-5
111-04609	T40I	290	4.0	80.0	180	PA66	Natural (NA)	1-5
111-04300	T40L	365	4.0	105	180	PA66	Natural (NA)	1-5
111-04301	T40L	365	4.0	105	180	PA66	Black (BK)	1-5

All dimensions in mm. Subject to technical changes.