

HK 25/2

Hydraulic crimping tool with foot pump 16 - 625 mm²

- Extremely wide cross section range up to 625 mm²
- Hydraulic system with 250 kN crimping force
- Foot pump with two-stage hydraulics

Characteristics


- For 25-series interchangeable dies, wide crimping
- H-Form crimping head with quick coupling, under no pressure, rotates 360°
- High-pressure hose, 2 m
- Manual retraction in case of need and at high pressure end

Order info

- The wide choice of available dies for the crimping head can be found in the catalog under Part-Number PK252.

Technical data	
Crimping force:	250 kN
Crimping range:	16 - 625 mm ²
Operating pressure:	max. 700 bar
Weight:	17.6 kg

Item	Part No.		
Hydraulic crimping tool with foot pump 16 - 625 mm ²	HK252		
Scope of supply	Part No.	Page	
High-pressure hose, 2m	HS22	380	
Steel carrying case	MKU	204	

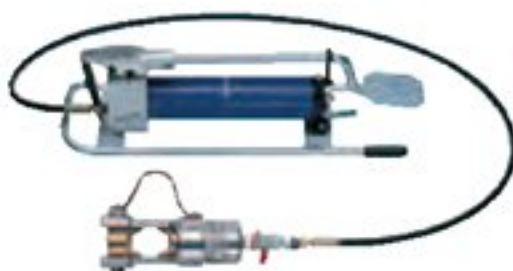

HK 45

Hydraulic crimping tool with foot pump 120 - 1,000 mm²

- Extremely large cross section range to 1,000 mm²
- Hydraulic system with 450 kN crimping force
- Foot pump with two-stage hydraulics

Characteristics

- For 45-series interchangeable dies, wide crimping
- Crimping head, H-shape with quick coupling
- Manual retraction in case of need and at high pressure end
- High-pressure hose, 2 m

Order info

- The wide choice of available dies can be found in the catalog under Part-Number PK45.

Technical data	
Crimping force:	450 kN
Crimping range:	120 - 1,000 mm ²
Operating pressure:	max. 700 bar
Weight:	23.0 kg

Item	Part No.		
Hydraulic crimping tool with foot pump 120 - 1000 mm ²	HK45		
Scope of supply	Part No.	Page	
High-pressure hose, 2m	HS22	380	
Steel carrying case	MKU	204	



AS 65 FHP

Hydraulic cutting tool with foot pump Ø 65 mm


- Cuts copper and aluminium cables with light weight steel armoured (depending on cable type)
- Also suitable for fine stranded cable
- Foot pump with two-stage hydraulics

Characteristics

- Open cutting head with quick coupling, under no pressure, rotates 360°
- High-pressure hose, 2 m
- Manual retraction in case of need and at high pressure end

Technical data	
Cutting range:	max. Ø 65 mm
Cutting force:	42 kN
Weight:	16.7 kg
Operating pressure:	max 700 bar

Item	Part No.		
Hydraulic cutting tool with foot pump Ø 65 mm	AS65FHP		
Scope of supply	Part No.	Page	
High-pressure hose, 2m	HS22	380	
Steel carrying case	MKU	204	



AS 105 FHP / AS 120 FHP

Hydraulic cutting tool with foot pump Ø 105 mm or Ø 120 mm

- Cuts copper and aluminium cables with light weight steel armoured (depending on cable type)
- Suitable for fine stranded cable and Telecommunication cable
- Foot pump with two-stage hydraulics

Characteristics

- Open cutting head with quick coupling, under no pressure, rotates 360°
- High-pressure hose, 2 m
- Manual retraction in case of need and at high pressure end

Technical data		
	AS105FHP	AS120FHP
Cutting range:	max. Ø 105 mm	max. Ø 120 mm
Cutting force:	74 kN	55 kN
Weight:	19.7 kg	20.7 kg
Operating pressure:	max. 700 bar	max. 700 bar

Item	Part No.		
Hydraulic cutting tool with foot pump Ø 105 mm	AS105FHP		
Hydraulic cutting tool with foot pump Ø 120 mm	AS120FHP		
Scope of supply	Part No.	Page	
High-pressure hose, 2m	HS22	380	
Steel carrying case	MKU	204	

